

WIRELESS WATER DETECTOR ALARM

Stand Alone Installation:

- Remove cover from back of unit and install supplied 9V battery (fig.1)
- Determine spot for the sensor. Do not place directly on humid concrete as this may trigger false alarms. Place sensor flat or use suction cup if surface is smooth.
- Once sensor location is chosen, turn the unit to ON. Wait for alarm activation BEEP (standby mode). Test the sensor with some water.
- Mount the alarm at desired height with screws provided.

Connection to Ideal's wireless dialer SK622 (fig.2)

Before connecting to a wireless dialer, each water detector must "learn" the wireless signal. Each sensor has its own "ID" which must be learned by the receiver/dialer. Follow the instructions in the manual for the SK622 (available at www.idealinc.com). Transmission ranges (up to 200 feet) will vary due to walls and levels. Test before completing installation. A maximum of 6 wireless water detectors can be added to the dialer. Dialer will not identify which sensor has been activated (siren sound will be heard when telephone is answered. Call display is very useful to determine where call is originating from).




Fig.1

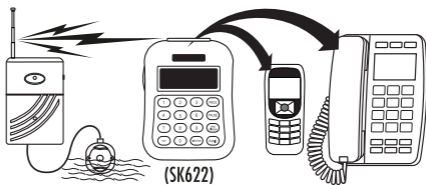


Fig.2

IDEAL SECURITY INC.
LASALLE, QC
PRESCOTT, ON
CORAOPOLIS, PA.

ONE YEAR WARRANTY
GARANTIE D'UN AN

www.idealinc.com

MADE IN CHINA
FABRIQUÉ EN CHINE

INFO?:



support@idealinc.com

1 800 361-2236 X 230